## Liebert® GXT3<sup>TM</sup>, 5kVA-10kVA UPS Compact UPS Systems For High Power Network Rack Applications







## Liebert® GXT3™, 5kVA-10kVA UPS Systems: Big Protection, Small Package

Today's converged networks require increased availability and reliability. This has created a need for higher density power protection systems that adapt to mixed load voltages and plug types, while remaining easy to install and maintain.

New IT technologies, such as VoIP and PoE, have greatly increased power demands. Unfortunately, as these requirements have risen, the amount of space available for your protected equipment and related power support systems has not.



Liebert GXT3 UPS meets the need for higher power capacities in small spaces. This true on-line double conversion UPS system is available in 5kVA – 10kVA models, and features integrated maintenance bypass, as well as optional extended battery runtime. Add support — Emerson Network Power Service — and it all equals greater power assurance and reliability.

Designed for use in either rack or tower configurations, all units offer the smallest available solutions for these power capacities — the 5 & 6kVA model at 120/208V output in 4U size, or the 8 & 10kVA unit 120/208V output in a 6U package. A 6kVA 208V output 5U size model is also available.

To help meet the need for choosing a single supplier for global applications, 220V, 230V and 240V 50/60 Hz models are offered with CE and C-tick markings.

#### Dual Voltages For Multiple Applications

Simultaneous output voltages of 240/120, 208/120, 230/115, 220/110, or 200/100 VAC provide the flexibility to adapt to multiple load requirements without the need to add additional transformers that take up extra space and add weight. Input power factor correction to 0.99 reduces current harmonics and their heating effects.

### Communications For Power Monitoring And Control

Liebert GXT3 UPS offers a variety of communications options to provide the monitoring and control capabilities demanded by today's network computing systems.


Operation can be monitored using:


- Liebert IntelliSlot Web Card provides SNMP and web-based monitoring and control of your UPS.
- Liebert MultiLink™ Automated System Shutdown Software
- Liebert Nform<sup>™</sup> Monitoring System
- Liebert Universal Monitor And Remote Power Monitor Panels
- Third-Party Monitoring Systems



Liebert IntelliSlot™ Webcard provides SNMP and web-based management



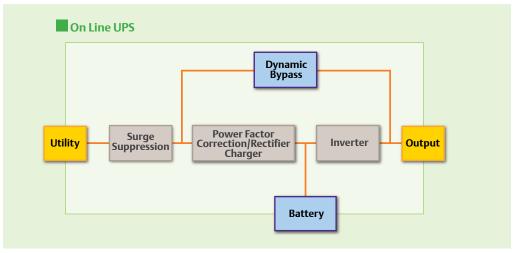

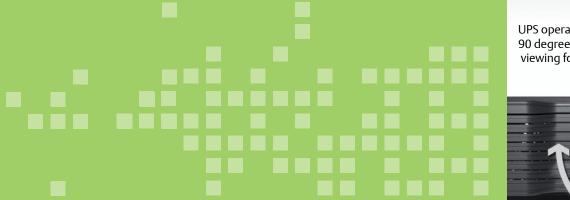

UPS operation and display panel can rotate 90 degrees, which provides upright viewing for users.



## Liebert® GXT3™ UPS Includes These Outstanding Features:

#### Flexibility:

- Rack/tower configuration. The versatile unit installs in either configuration, and includes a rotating LED display panel that conforms to the desired orientation.
- Automatic frequency detection. Detects and matches line input frequencies of either 60 or 50 Hz.
- User replaceable hot-swappable internal batteries. Provide four minutes of runtime at full load.
- Additional runtime with additional battery cabinets. UPS cabinet includes rear panel plug-and-play connections for optional battery cabinets. Cabinet sizes: 5-6kVA – 2U, 8-10kVA – 4U, 6kVA 208V – 3U
- Liebert IntelliSlot™ communications port. Utilizes Liebert IntelliSlot Web Card to provide SNMP and web-based monitoring and control of your UPS.
- Includes Windows-based configuration program. Allows various operating parameters to be adjusted and tests to be scheduled.
- Built-in USB communications for use with Liebert MultiLink™ Automated Shutdown Software. Allows you to monitor communication between the UPS and a server, and ensures a graceful unattended shutdown.
- Built-in closure signals. Provides notification to monitoring systems of operating conditions including: on battery, low battery, battery mode shutdown and any mode shutdown.
- Emergency Power Off (EPO). Terminal connections for a normally open or normally closed emergency power off switch.

#### **Higher Availability:**

- Wider input voltage window minimizes battery use. Features a wide input voltage window that allows the UPS to support the critical load without having to transfer to battery, extending system availability for when battery back-up is truly needed.
- Internal automatic and manual bypass. Assures continuity of power to critical loads during system maintenance or in case of internal fault.
- Self-diagnostics. Automatically tests unit electronics and batteries. Designed to simplify maintenance and troubleshooting.

#### **Lowest Total Cost Of Ownership:**

- Standard two-year replacement warranty. No-hassle warranty provides paid shipping both ways. Optional one-year and three year extensions available.
- Uses less rack space. Leaves more room for network equipment.
- For longer service life. Shields batteries from heat generating electronic components, enhancing battery life.
- Battery cutoff voltage Automatically adjusts based on load, extending battery life by preventing over-discharge of batteries.
- ENERGY STAR® qualified UPS models

UPS products meeting the EPA's requirements use an average of 35% less energy than their standard counterparts.



## Liebert Power Assurance Package Offers A Worry-Free UPS Solution For Your Network

Liebert GXT3 5-10kVA UPS systems may be purchased as par of the Liebert Power Assurance Package. While today's smaller, rack-based UPS systems offer relatively trouble-free operation, the growing criticality of the systems they support has increased the cost of downtime. As a result, the need to maintain these smaller UPS systems is increasingly important.

This all-inclusive package offers you complete peace-of-mind for five years including:

**UPS** — A compact, high quality on-line Liebert GXT3 UPS (5, 6, 8 or 10kVA).

**Start-up** — On-site system start-up by a certified Emerson Network Power Customer Engineer, scheduled anytime, 24 x 7. This includes removal and disposal of your existing UPS.

Preventive maintenance —
One preventive maintenance
visit completed in year 3 by a
certified Emerson Network Power
Customer Engineer includes 100%
Parts Coverage — even internal
batteries.

Full parts coverage — Your on-line Liebert UPS benefits from 100% parts coverage for five years, including all internal batteries.

On-site service — Should you experience a problem, we will dispatch a certified Emerson Network Power Customer Engineer to repair or replace your equipment — with 4-hour response guaranteed.

## 5 Or 6kVA Of True On-Line Power In A Compact 4U Package

Liebert® GXT3™ 5 & 6kVA models are true on-line UPS systems that provide internal batteries and dual output voltage. They are an ideal fit for applications where the power requirements are demanding — but rack space is limited — delivering 5kVA (4kW) or 6kVA (4.8kW) of power in a single 4U size cabinet. This cabinet size is well suited for installations such as network closets or small data centers.



PD2-HDWR ships standard

with the unit and is hardwire

#### ■ 5 & 6 kVA Model shown in rack mount position

#### Adaptable Design

For installation flexibility, the Liebert GXT3 5 & 6kVA models allow you to choose from several different wiring configurations made possible by the use of removable power distribution boxes that simply plug into the rear of the UPS. The standard box provides terminal blocks for hardwired input and output connections. An optional hardwire version that includes a maintenance bypass is also available.

When the ease of plug-and-play power connections is desired, optional versions of the power distribution box convert Liebert GXT3 5 & 6kVA units to a cord-type input with receptacles for output distribution, and also offers maintenance bypass capability that allows hot-swapping of the entire UPS. The UPS has as adaptable dual inverter design, capable of providing simultaneous output voltages of 240/120, 208/120, 230/115, 220/110, or 200/100 and an output power factor of 0.8.



input/output

PD2-HDWR-MBS is an optional hardwire input/output POD with maintenance bypass



Pluggable input/output PODs available with maintenance bypass



 6 kVA Model shown in tower position with optional battery cabinet

# 8kVA And 10kVA Of Power In Just 6U Of Space



The internal battery packs are hot-swappable, and user repleaceable. The unit also supports up to four external battery cabinets for extended run time.



■ 8 & 10 kVA Model shown in rack mount position



UPS is hardwire input/output with maintenance bypass and includes no POD standard.



■ 10 k VA Model shown in tower position with optional battery cabinet



Optional PODs available

This Liebert® GXT3™ 8 & 10kVA units offer a flexible solution for protecting rack-mount equipment, including VoIP and PoE. Especially designed for use with the new generation of high power switches, these compact UPS systems pack 8kVA (7.2kW) or 10kVA (9kW) of power into a 6U rack/tower package with flexible output voltage and optional output distribution. The UPS includes built-in, user-replaceable batteries for up to four minutes of runtime at full load.

#### **Adaptable Design**

The UPS has a dual inverter design, capable of providing simultaneous output voltages of 240/120, 208/120, 230/115, 220/110, or 200/100 and an output power factor of 0.9. The new 6U cabinet is the smallest for 208/120 selectable voltage in the 8-10kVA size. The unit features integrated internal manual and automatic maintenance bypass, power module, battery modules, auto detection of extended battery cabinets and optional plug-and-play distribution plates.

The standard 8 & 10kVA models include terminal blocks for hardwired connections of both input and output. Optional power distribution modules are available to add output receptacles to the rear panel of the unit.

#### **Hot-Swappable Operation**

Liebert GXT3 8 & 10kVA units feature three bays for one power module and two battery modules. The chassis contains a bypass switch that allows all modules to be removed without powering down the connected load.

## Product specifications

5XT3-5000RT208 4000W/5000VA 16.9 x 20 (430 x 66 56.2 (	52 x 173) (25.5)	(430 x 6	GXT3-10000RT208 9000W/10000VA 6.5 x 10.3 572 x 261) (35.5)	GXT3-6000RTL630 4200W/6000VA 16.9 x 22.6 x 8.5 (430 x 574 x 217) 51.8 (23.5)			
16.9 x 20 (430 x 66	6.1 x 6.8 62 x 173) (25.5)	16.9 x 2 (430 x 6 78.3	6.5 x 10.3 672 x 261)	16.9 x 22.6 x 8.5 (430 x 574 x 217)			
56.2 (			(35.5)	51.8 (23.5)			
	120,	50 or 60Hz /Factory D					
	120	50 or 60Hz (Factory D					
	120	50 or 60Hz (Eactory D					
	120	50 or 60Hz (Factory Default is 60Hz)					
	120/208VAC						
	120 VAC nominal						
	40 - 70 Hz						
	L6-30P input plug (L-L-G						
	N/A						
		208 or 240VAC					
		N/A					
	100/110/115/	/120/127VAC, ±2%		N/A			
		1 Minute	<u>.</u>				
		32 to 104 (0 t	n 40)				
	Less than 55dRA at 3	,	,	nt and sides			
			· · ·	le dila sides			
	- F						
			3				
		LII 1770 a.I.I	Listo d				
		. 25					
		ı					
GXT3-14	14BATKIT	GXT3-2	88RTBKIT	GXT3-240BATKIT			
GXT3-60	00RT208	GXT3-10	0000RT208	GXT3-6000RTL630			
				7.2 x 15.4 x 4.4 (184 x 390 x 113)			
75.8	(34.4)	71.2	(32.3)	45.4 (20.6)			
	•	Valve-regulated, non-sp	oillable, lead acid				
2 x 6 x 12	V x 9.0 AH	2 v 12 v 1	2V x 9.0 AH	2 x 10 x 12V x 4.5AH			
		2 \ 12 \ 1					
	GXT3-50 GXT3-60 8.1 x 19 (206 x 4 75.8	GXT3-144BATKIT GXT3-5000RT208 GXT3-6000RT208 8.1 x 19.3 x 2.8 (206 x 490 x 70) 75.8 (34.4)	Less than 55dBA at 3.2ft. (1m) rear; less than  Up to 10,000 ft. (3000m) at 104°l  0% to 95%, non-co  UL 1778, c-UL  FCC Part 15, Subpart B, Cl  IEEE/ANSI C62.41 Ca  ISTA Procedur  YES  GXT3-144BATKIT  GXT3-2000RT208  GXT3-6000RT208  GXT3-1000RT208  GXT3	GXT3-144BATKIT  GXT3-5000RT208 GXT3-6000RT208  8.1 x 19.3 x 2.8 (206 x 490 x 70)  75.8 (34.4)  Valve-regulated, non-spillable, lead acid			

LACCITICI DO		•										
		Model Numbe	r	GXT	3-144VBATT		GX	T3-240VBATTU	JL	GX	T3-288RTVBATT	
Used w/UPS Model		el (	GXT3-5000 & GXT3-6000RT208			GXT3-6000RTL630			GXT3-8000 & GXT3 10000RT208			
Dimensions, W x D x H, Unit (with bezel) in. (mm)			16.9 x 26.1 x 3.3 (430 x 662 x 85)			16.9 x 22.6 x 5.1 (430 x 574 x 130)		16.9 x 26.5 x 6.8 (430 x 672 x 173)				
Weight, Unit lb (kg)			1)	99.9 (45.3)			94.8 (43)			29.8 (13.5)		
Battery Param	neters											
		Тур	e			\	/alve-regula	ted, non-spillab	le, lead acio	ł		
Kit Quantity x Battery Quantity x Rating			g	2 x 6	x 12V x 9.0 A	Н	2 x	10 x 12V x 9.0 A	<b>Н</b>	2 x	2 x 12 x 12V x 9.0 AH	
Environmenta	al				Operating 1	Temp, Storage	Temp, Oper	ating Elevation,	and Relativ	e Humidity: Sa	me as UPS	
Power dist	ribution b	oox specific	ations	: GXT3-5	000RT208	and GXT3	-6000RT	208			GXT3-6000RTL630	
Power Distril Mod	bution Box lel Number	PD2-HDWR	PD2-HI	OWR-MBS	PD2-001	PD2-002	PD2-003	PD2-004	PD2-00	5 PD2-006	PD2-L630	
Dimensions, Ur	, W x D x H, nit in (mm)		x15.5x3.5 2x393x88		5.2x15.5x3.5 (132x393x88)			5.2x15.5x3.5 132x393x88)		x15.5x3.5 2x393x88)	4.7x13.2x4.1 (119x335x105)	
Wei	ght, lb (kg)	5.1 (2.3)		5 (2.7)	8.8 (4)	8.6 (3.9)	8.6 (3.9)	9.9 (4.5)	10.6 (4.8	9.5 (4.3)	8.8 (4)	
Electrical Spec	cifications											
A	Amp Rating					30A 2-pole i	nput breake	r for UPS input p	ower			
In	nput Power	Hardwire	Terminal	Block		·	[1]   14 200	on a 2 2m cord			/1\16.20D	
	onnections	3W + G (L-L-N-G)		G)			[1] L14-30P on a 3.2m cord				(1) L6-30P	
	tput Power Connection	Hardwire 3W +	Terminal G (L-L-N-		(4) 5-20R (1) L14-30R (1) L6-30R		(4) 5-20F (2) L6-30		(4) L5-20 (2) L6-30		(2) L6-20R (2) L6-30R	
Power dist	ribution b	ox specific	ations	for GXT3	-8000RT2	208 and GX	T3-1000	ORT208				
Power Distrib Mod	bution Box lel Number			PD2	D2-102 PD2-10		03	PD2-104		PD2-105	PD2-106	
	ons, W x H, lit in. (mm)	7.4 x 5.7(188 x 145) 7.4 x 5.7(		188 x 145) 7.4 x 5.7(188		3 x 145)	7.4 x 5.7(188 x 145)		x 5.7(188 x 14	5) 7.4 x 5.7(188 x 145)		
Weight, l												
	Unit lb (kg)	4.4 (2)	)	6.6	5(3)	6.6 (3	)	6.6 (3)		4.4 (2)	6.6 (3)	
Electrical Spec	,	4.4 (2)	)	6.6	5(3)	6.6 (3	)	6.6 (3)			6.6 (3)	
•	,	4.4 (2)		6.6	5(3)		) pole 60A In				6.6 (3)	
A In	cifications Amp Rating	4.4 (2)		6.6		2-	pole 60A In		o Chassis		6.6 (3)	
A In Co	cifications Amp Rating	(2) L6-3 (8) 5-20	0	(4) L		2-	pole 60A In nal Block 3V DR	put Breaker	o Chassis		(4) L6-20R (4) L5-20R	
A In Co Out C	Amp Rating Amp Rating Aput Power Connections	(2) L6-3 (8) 5-20	0	(4) L	H 5-20R	2- Iardwire Termi (4) 5-21	pole 60A In nal Block 3V DR	put Breaker V + G (L-L-N-G) t (4) 5-20R (2) L6-30R	o Chassis	4.4 (2) (4) 5-20R (2) L5-30R	(4) L6-20R	
A In Co	cifications Amp Rating Apput Power Connections Apput Power Connection	(2) L6-3 (8) 5-20 inutes	0 0 0 R	(4) L	H 5-20R	2- Iardwire Termi (4) 5-21	pole 60A In nal Block 3V DR	put Breaker V + G (L-L-N-G) t (4) 5-20R (2) L6-30R	o Chassis	4.4 (2) (4) 5-20R (2) L5-30R	(4) L6-20R	
A In Co Out C Battery rur	cifications Amp Rating Amp Rating Amput Power Connections Amput Power Connection	(2) L6-3 (8) 5-20 inutes Run Time, Min	00 RR <b>utes</b>	(4) L(4) 5	H 5-20R 5-20R	2- lardwire Termi (4) 5-2( (4) L6-3	pole 60A In nal Block 3V DR OR	put Breaker V + G (L-L-N-G) t (4) 5-20R (2) L6-30R (2) L6-20R		(4) 5-20R (2) L5-30R (2) L5-20R	(4) L6-20R (4) L5-20R	
A In Co Out C Battery rur	cifications Amp Rating Amp Rating Amp Rower Connections Amp Rating	(2) L6-3 (8) 5-20 inutes Run Time, Min GXT3-5000RT2	00 R utes	(4) L(4) 5	6-20R 5-20R 5-20R	2- lardwire Termi (4) 5-2( (4) L6-3	pole 60A Inj nal Block 3V DR OR	put Breaker V + G (L-L-N-G) t (4) 5-20R (2) L6-30R (2) L6-20R	XT3-8000R	4.4 (2) (4) 5-20R (2) L5-30R (2) L5-20R	(4) L6-20R (4) L5-20R	
A In Co Out C Battery rur	cifications Amp Rating Apput Power Connections Apput Power Connection A time, mi	(2) L6-3 (8) 5-20 inutes Run Time, Min GXT3-5000RT2	0 R <b>utes</b> <b>208</b>	(4) L(4) 5	H 5-20R 5-20R -6000RT208	2- lardwire Termi (4) 5-2( (4) L6-3	pole 60A Inpal Block 3V DR OR T3-6000RTI	put Breaker V + G (L-L-N-G) t (4) 5-20R (2) L6-30R (2) L6-20R	<b>XT3-8000R</b>	(4) 5-20R (2) L5-30R (2) L5-20R	(4) L6-20R (4) L5-20R GXT3-10000RT208	
A In Co Out C Battery rur	cifications Amp Rating Amp Rating Amp Rower Connections Amp Rating	(2) L6-3 (8) 5-20 inutes Run Time, Min GXT3-5000RT2	0 R <b>utes</b> <b>208</b>	(4) L(4) 5	6-20R 5-20R 5-20R	2- lardwire Termi (4) 5-2( (4) L6-3	pole 60A Inj nal Block 3V DR OR	put Breaker V + G (L-L-N-G) t (4) 5-20R (2) L6-30R (2) L6-20R	<b>XT3-8000R</b>	4.4 (2) (4) 5-20R (2) L5-30R (2) L5-20R	(4) L6-20R (4) L5-20R	
A In Co Out C Battery rur	cifications Amp Rating Apput Power Connections Apput Power Connection A time, mi	(2) L6-3 (8) 5-20 inutes Run Time, Min GXT3-5000RT2	utes	(4) L(4) 5	H 5-20R 5-20R -6000RT208	2- lardwire Termi (4) 5-2( (4) L6-3	pole 60A Inpal Block 3V DR OR T3-6000RTI	put Breaker V + G (L-L-N-G) t (4) 5-20R (2) L6-30R (2) L6-20R	<b>XT3-8000R</b> 15 5	(4) 5-20R (2) L5-30R (2) L5-20R	(4) L6-20R (4) L5-20R GXT3-10000RT208	
A In Co Out C Battery rur	cifications Amp Rating	(2) L6-3 (8) 5-20 inutes Run Time, Min GXT3-5000RT2 105 50	0 R <b>utes</b> 208	(4) L(4) 5	5-20R 5-20R 5-20R -6000RT208 100 41	2- lardwire Termi (4) 5-2( (4) L6-3	pole 60A In nal Block 3V DR OR T3-6000RTI >90 60	put Breaker V + G (L-L-N-G) t (4) 5-20R (2) L6-30R (2) L6-20R	<b>XT3-8000R</b> 15 5 3	(4) 5-20R (2) L5-30R (2) L5-20R	(4) L6-20R (4) L5-20R GXT3-10000RT208 90 42	
A In Co Out C Battery rur	cifications Amp Rating Apput Power Connections Apput Power Connection An time, mi Load 10% 20% 30%	(2) L6-3 (8) 5-20 inutes Run Time, Min GXT3-5000RT2 105 50 30	00 RR <b>utes</b> <b>208</b>	(4) L(4) 5	6-20R 6-20R 6-20R -6000RT208 100 41 23	2- lardwire Termi (4) 5-2( (4) L6-3	pole 60A Inparametric pol 60A Inparametric pole 60A Inparametric pole 60A Inparametric pol 60A Inparametric po	put Breaker V + G (L-L-N-G) t (4) 5-20R (2) L6-30R (2) L6-20R	XT3-8000R 1! 5 3 2	(4) 5-20R (2) L5-30R (2) L5-20R (2) L5-20R	(4) L6-20R (4) L5-20R GXT3-10000RT208 90 42 26	
A In Co	cifications Amp Rating Amp Rating Apput Power Connection  In time, mi Load 10% 20% 30% 40%	(2) L6-3 (8) 5-20 inutes Run Time, Min GXT3-5000RT2 105 50 30 22	00 PR utes 208	(4) L(4) 5	-6000RT208 100 41 23 17	2- lardwire Termi (4) 5-2( (4) L6-3	pole 60A In nal Block 3V DR OR T3-6000RTI >90 60 40 27	put Breaker V + G (L-L-N-G) t (4) 5-20R (2) L6-30R (2) L6-20R	XT3-8000R 15 3 2 1	(4) 5-20R (2) L5-30R (2) L5-20R (2) L5-20R	(4) L6-20R (4) L5-20R GXT3-10000RT208 90 42 26 18	
Out C Battery run Internal Battery	cifications Amp Rating	(2) L6-3 (8) 5-20 inutes Run Time, Min GXT3-5000RT2 105 50 30 22	0 R <b>utes</b> <b>208</b>	(4) L(4) 5	-6000RT208 100 41 23 17 12	2- lardwire Termi (4) 5-2( (4) L6-3	pole 60A In nal Block 3V DR OR T3-6000RTI >90 60 40 27 21	put Breaker V + G (L-L-N-G) t (4) 5-20R (2) L6-30R (2) L6-20R	XT3-8000R 1! 5 3 2 1	(4) 5-20R (2) L5-30R (2) L5-20R (2) L5-20R	(4) L6-20R (4) L5-20R GXT3-10000RT208 90 42 26 18 13.5	

4.5

External battery cabinet specifications

90%

100%

4.5

Emerson Network Power, a business of Emerson (NYSE:EMR), delivers software, hardware and services that maximize availability, capacity and efficiency for data centers, healthcare and industrial facilities. A trusted industry leader in smart infrastructure technologies, Emerson Network Power provides innovative data center infrastructure management solutions that bridge the gap between IT and facility management and deliver efficiency and uncompromised availability regardless of capacity demands. Our solutions are supported globally by local Emerson Network Power service technicians. Learn more about Emerson Network Power products and services at www.EmersonNetworkPower.com

#### Emerson Network Power Global Headquarters

1050 Dearborn Drive P.O. Box 29186 Columbus, Ohio 43229 800 877 9222 Phone (U.S. & Canada Only) 614 888 0246 Phone (Outside U.S.) Contact@EmersonNetworkPower.com

#### Emerson Network Power Caribbean and Latin America

Office – United States of America +1-954-984-3452 Phone Ask.Cala@Emerson.com

#### **Emerson Network Power Canada**

3580 Laird Rd Unit 1 Mississauga Ontario L5L 527 +1 905 569 8282 Ask@EmersonNetworkPower.com

#### liebert.com 24 x 7 Tech Support

800 222 5877 Phone 614 841 6755 (outside U.S.)

EmersonNetworkPower.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Liebert Corporation assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. © 2013 Liebert Corporation. All rights reserved throughout the world. Specifications subject to change without notice. All names referred to are trademarks or registered trademarks of their respective owners. © Liebert is a registered trademark of the Liebert Corporation.

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2013 Emerson Electric Co. SL-23184 (R11/13) Printed in USA